


Transmitter Dynamic Performance Test

A. Connect equipment as diagramed below.

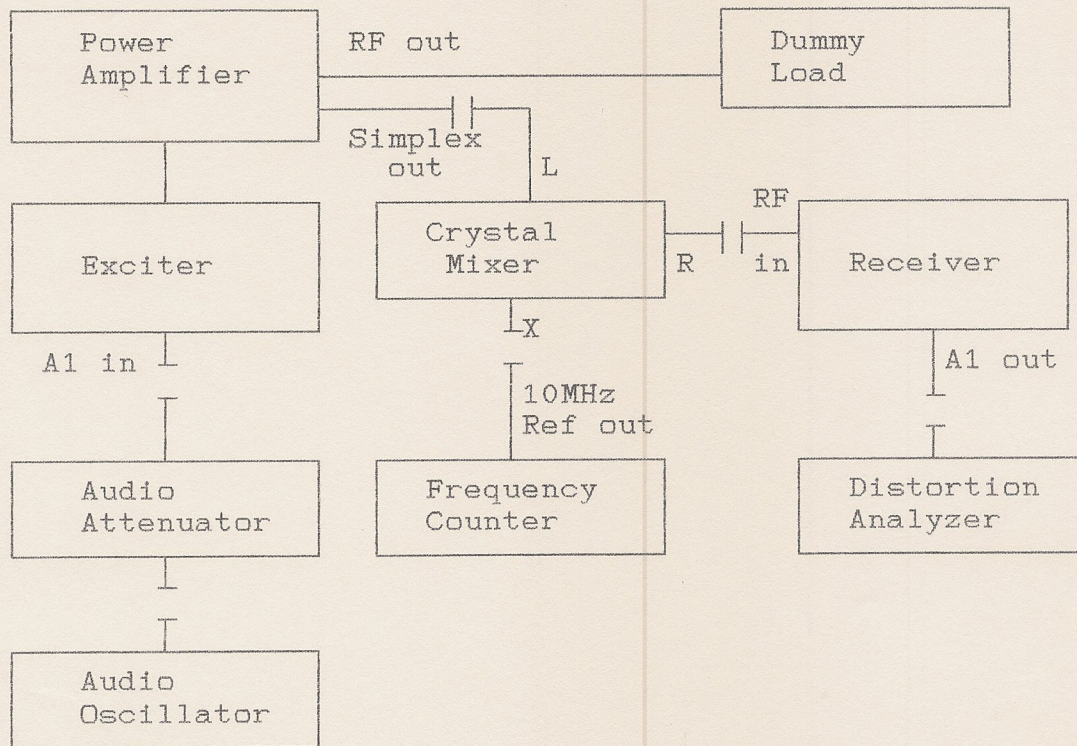

- B. Set Audio Oscillator to 1KHz at 0dB.
- C. Set Audio Attenuator to minimum attenuation.
- D. Key transmittter and adjust the attenuuator to the maximum setting required to maintain a 10dB s/n ratio.
- E. Attenuation should be at least 30dB.